

FS-IP6360-V



The FS-IP6360-V is a mini 6.0MP, Ultra-HD, 360° Panoramic, IP network surveillance camera. The FS-IP6360-V was purposefully designed to be a discrete, cost-efficient, and unobtrusive security and surveillance solution for various applications. The FS-IP6360-V, with its built in Edge Storage, is the perfect solution for both distributed and standalone surveillance systems. With Sentry360's patented dewarping algorithm, it allows users to correct the fisheye perspective and enable multiple views that can pan-tilt-zoom independently with no moving parts or blind spots.

SPECIFICATIONS

CAMERA

Image Sensor	6.0 megapixel 1/1.8" CMOS	
Effective Pixels	3072 x 2048	
Minimum Illumination	Color:	B/W:
	0.01 Lux F/2.0	0 Lux F/2.0
Shutter Speed	~ 1/3(4) - 1/10000 sec	
Signal to Noise	>50 dB	
Dynamic Range	120 dB	

LENS

Lens Type	Fisheye: 1.55 mm f-theta
F Number	F/2.0
Field of View	360°

OPERATION

Languages	English / French / German / Italian / Japanese / Korean / Portuguese / Russian / Simplified Chinese / Spanish / Traditional Chinese
Image Control	Backlight Compensation, Exposure (Auto / Manual), White Balance (Auto / Manual), 3D Noise Reduction, Wide Dynamic Range, Privacy Mask
Image Settings	Brightness, Sharpness, Contrast, Saturation, Hue
Pan / Tilt / Zoom	Digital PTZ
Audio	1/1 channel In/Out(Built in Mic)
SD Card	microSD 64 GB Support

EVENTS

Motion Detection	Multiple groups and windows
Alarms	Tampering, Network Failure Detection, Audio Detection, Input / Output
Event Notification	HTTP / FTP / SMTP

NETWORK

Interface	RJ-45, 10/100 Mbps Ethernet	
Protocols	HTTP, TCP, ARP, RTSP, RTP, UDP, RTCP, SMTP, FTP, DHCP, DNS, DDNS, PPPOE, IPv4/v6, SNMP, QoS, UPnP, NT, ONVIF, PSIA, NTP	
Security	HTTPS / IP Filter / IEEE 802.1X	
Accounts	User and Administrator, Up to 20	
Web Browser	Internet Explorer (6.0+) / Chrome / Firefox / Safari	

STREAMING

Video Format	Dual Stream: H.264, MJPEG	
Main Stream	Resolution	FPS
	3072 x 2048	30
	1920 x 1080	60
	1280 x 1024	60
	1280 x 720	60
	1024 x 768	60
	800 x 600	60
	720 x 480	60
	640 x 480	60
	352 x 240	60
	320 x 240	60
Data Transmission	Data Rate	TBD
	MJPEG	
	Data Rate	TBD
	H.264	
	Frame Rate	TBD
	Max Frame Rate	TBD

MECHANICAL

Gimbal	N/A	
IR Filter	TBD	
IR Illuminator	3 LEDs, up to 10m	
Connectors	Alarm	2/1 channel In/Out
	Power	DC12V, POE (802.3at)
	Analog Video	N/A
Dimensions	151 x 50.8 mm (5.9 x 2 in)	
Weight	0.58 kg (1.28 lbs)	

ELECTRICAL

Consumption	<11 Watts
Source	DC 12V / PoE 802.3af

ENVIRONMENTAL

Operating Temperature	-30° to 60°C (-22° to 140°F)
Humidity	<95%
Weather Rating	IP67
Impact Rating	IK10

REGULATORY


Certifications	CE / FCC / RoHS / UL Listed
-----------------------	-----------------------------

ACCESSORIES

DM-JBOX	J-Box Adapter
DM-MK-2	Mounting Kit
DM-CEILING	Ceiling mount (Requires DM-MK-2)
DM-CORNER	Corner mount (Requires DM-MK-2)
DM-POLE	Pole mount (Requires DM-MK-2)
DM-PENDANT	Pendant style wall mount (Requires DM-MK-2)

WARRANTY

Minimum 3 Year Parts and Labor

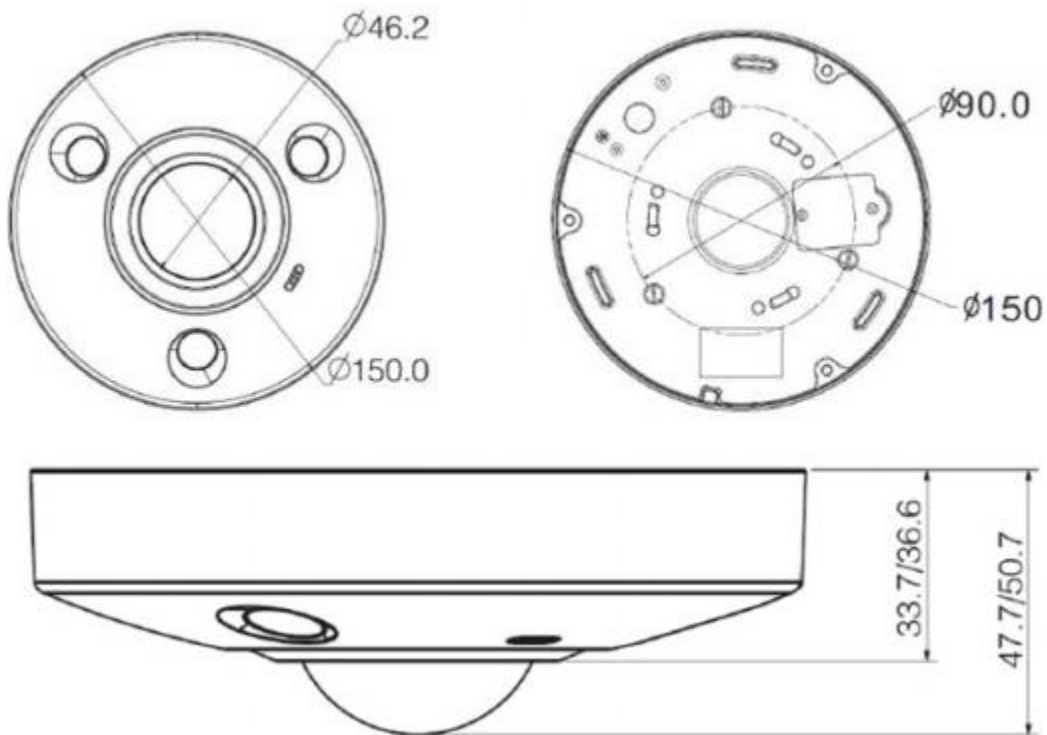

Sentry 360 Security, Inc. reserves the right to change products or