

IS-BL400



The IS-BL400 is a compact, 4.0MP, HD, IP Bullet camera. The IS-BL400 was designed to deliver a crisp, detailed image in full motion. Our compact bullet line possesses the best features of both worlds. It takes the best qualities of the compact bullet line and adds the power and functionality of our full-sized bullet line. Sentry 360's compact bullet line conforms to all industry standards including ONVIF, PSIA, and CGI.

SPECIFICATIONS

CAMERA

Image Sensor	4 megapixel 1/3" CMOS	
Effective Pixels	2688 x 1520	
Minimum Illumination	Color:	B/W:
	0.01 lux/F2.0	0 lux/F2.0
Shutter Speed	~ 1/3(4) - 1/100000 sec	
S/N Ratio	>50dB	
Dynamic Range	120dB	

LENS

Lens Type	Fixed Lens Manual Focus
Focal Length	3.6mm
F Number	F2.0
Field of View	84°

OPERATION

Languages	English / French / German / Italian / Japanese / Korean / Portuguese / Russian / Simplified Chinese / Spanish / Traditional Chinese
Image Control	Backlight Compensation, Exposure (Auto / Manual), White Balance (Auto / Manual), 3D Noise Reduction, Wide Dynamic Range (Shutter WDR), Privacy Mask
Image Settings	Brightness, Sharpness, Contrast, Saturation, Hue
Pan / Tilt / Zoom	Digital PTZ
Audio	N/A

EVENTS

Motion Detection	Multiple groups and windows
Alarms	Tampering, Network Failure Detection
Event Notification	HTTP / FTP / SMTP

NETWORK

Interface	RJ-45, 10/100 Mbps Ethernet
Protocols	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI
Security	HTTPS / IP Filter / IEEE 802.1X
Accounts	User and Administrator, Up to 20
Web Browser	Internet Explorer (6.0+) / Chrome / Firefox / Safari

STREAMING

Video Format	Three Streams: H.264, H.264B, H.264H, MJPEG	
Main Stream	Resolution	FPS
	2688 x 1520	15
	2048 x 1536	30
	1920 x 1080	30
	1280 x 1024	30
	1280 x 720	30
	1024 x 768	30
	800 x 600	30
	720 x 480	30
	640 x 480	30
Data Transmission	Data Rate	TBD
	MJPEG	
	Data Rate	TBD
	H.264	
	Frame Rate	TBD
	Max Frame Rate	TBD

MECHANICAL

Gimbal	N/A
IR Filter	TBD
IR Illuminator	24 IR, <30M in Length
Connectors	Alarm N/A Power DC Jack Analog Video N/A
Dimensions	70 x 165 mm (2.76 x 6.5 in)
Weight	0.42 kg (0.93 lb)

ELECTRICAL
Consumption <5 Watts

Source DC 12V / PoE 802.3af

ENVIRONMENTAL
Operating Temperature -40° to 60°C (-40° to 140°F)

Humidity <95%

Weather Rating IP67



Impact Rating TBD

REGULATORY
Certifications CE / FCC / UL Listed

ACCESSORIES
Pole Mount BL-POLE

WARRANTY

Minimum 3 Year Parts and Labor

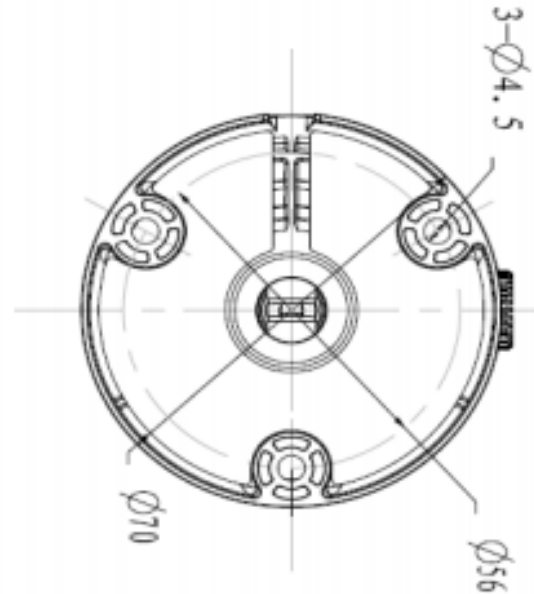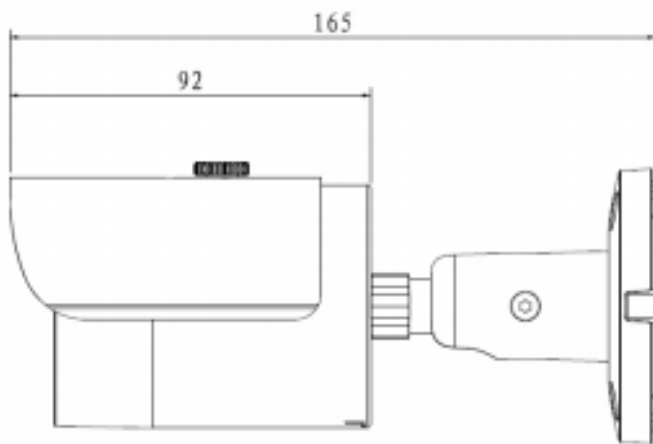

Sentry 360 Security, Inc. reserves the right to change products or